



VER.	REVISED RECORD	DATA
V1.0	PCB VER:2.0 : 宽屏	2025-05-28

1. 外形图

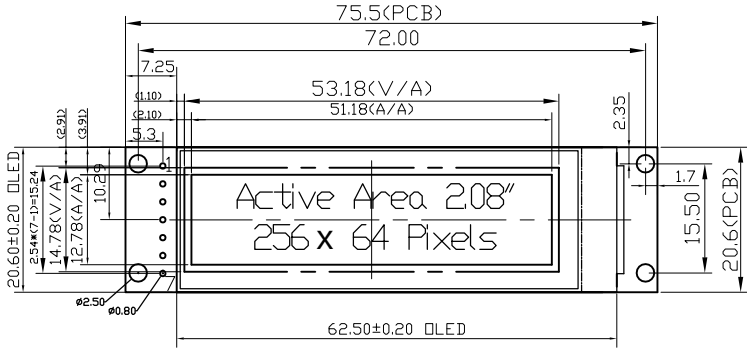

2. 功能&特性

- 2-1. 分辨率: 256X64
- 2-2. OLED材料: 高亮 PM_OLED
- 2-3. 颜色: 白色
- 2-4. 灰度类型: 16阶灰度
- 2-5. LCM工作电压(VCC_IN): 3~5V
OLED屏工作电压(Vdd): 3V(1.65~3.5V)
- 2-6. OLED驱动电压Vop: 12V (11.5~12.5V)
- 2-7. 工作温度: -40℃~70℃
- 2-8. 储存温度: -40℃~85℃
- 2-9. 连接方式/驱动IC: COG/SH1122G
24P间距0.7mm 焊接
- 2-10. 接口: 4线SPI
- 2-11. 视角方向: 全视角

3. 机械规格

- 3-1. 模块尺寸: 75.5mm(L)*20.6mm(W)*5.6mmMAX(H)
- 3-2. 可视区域(V/A): 53.18mm(L)*14.78mm(W)
- 3-3. 有效区域(A/A): 51.18mm(L)*12.78mm(W)
- 3-4. 点距离: 0.20mm(L)*0.20mm(W)
- 3-5. 点尺寸: 0.18mm(L)*0.18mm(W)

NO.	Symbol
1	GND
2	VCC
3	SCL
4	SDA
5	RST
6	DC
7	CS

SHEET: 1 of 1			
APPROVALS		DATE	
DWN			
CHK			
APP			
MODEL NUMBER :		SCALE:	UNITS:
GME25664-65_LCM(宽屏)		Unspecified TOL:± 0.2	MM
DO NOT SCALE THIS DRAWING.			