

深圳市金逸晨电子有限公司

ShenZhen GoldenMorning Electronic Co.,Ltd

PRODUCT SPECIFICATION

Model No	EB225-04-07-WB
Product Name	2.25 OLED Module
Version	V1
Date	2025-08-06

- ☐ Preliminary Specification
☒ Final Specification

PREPARED BY	CHECKED BY	APPROVED BY

Revision History

Version	Date	Page	Revise record	Remarks
V1	2025-08-06	-	First issued	-

TABLE OF CONTENT

NO.Contents	Page
1. General Parameter	04
2. Physical drawing	04
3. Mechanical Dimension	05
4. Absolute Maximum Ratings	06
5. DC Characteristics	06
6. Pins Definitions.	07
7. Timing Characteristics	08
8. Electro-optical Characteristics	09
9. Reliability	10
10. Precautions	11

1. General Parameter


NO.	Features	Details	Unit
1	Display Size(Diagonal)	2.25"	Inch
2	LCD type	OLED	-
3	View Direction	ALL	-
4	Drive Duty	1/96	-
5	Resolution	256(W) x 96(H)	Pixels
6	Module size	74.42(W)×28.00(H)×3.66 (T)	mm
7	Active Area	53.00 (W)×21.70 (H)	mm
8	Pixel Pitch	0.207(W)×0.226(H)	mm
9	Pixel Size	0.187(W)×0.206(H)	mm
10	Interface	4-Wire SPI	-
11	Display Colors	White	-
12	Driver IC	SH1126	-
13	IC package type	COG	-
14	Operating Temperature	-20℃~70℃	℃
15	Storage Temperature	-30℃~80℃	℃
16	Weight	-	g

Note 1 : Please refer to the mechanical drawing.

2. Physical drawing



3. Mechanical Dimension

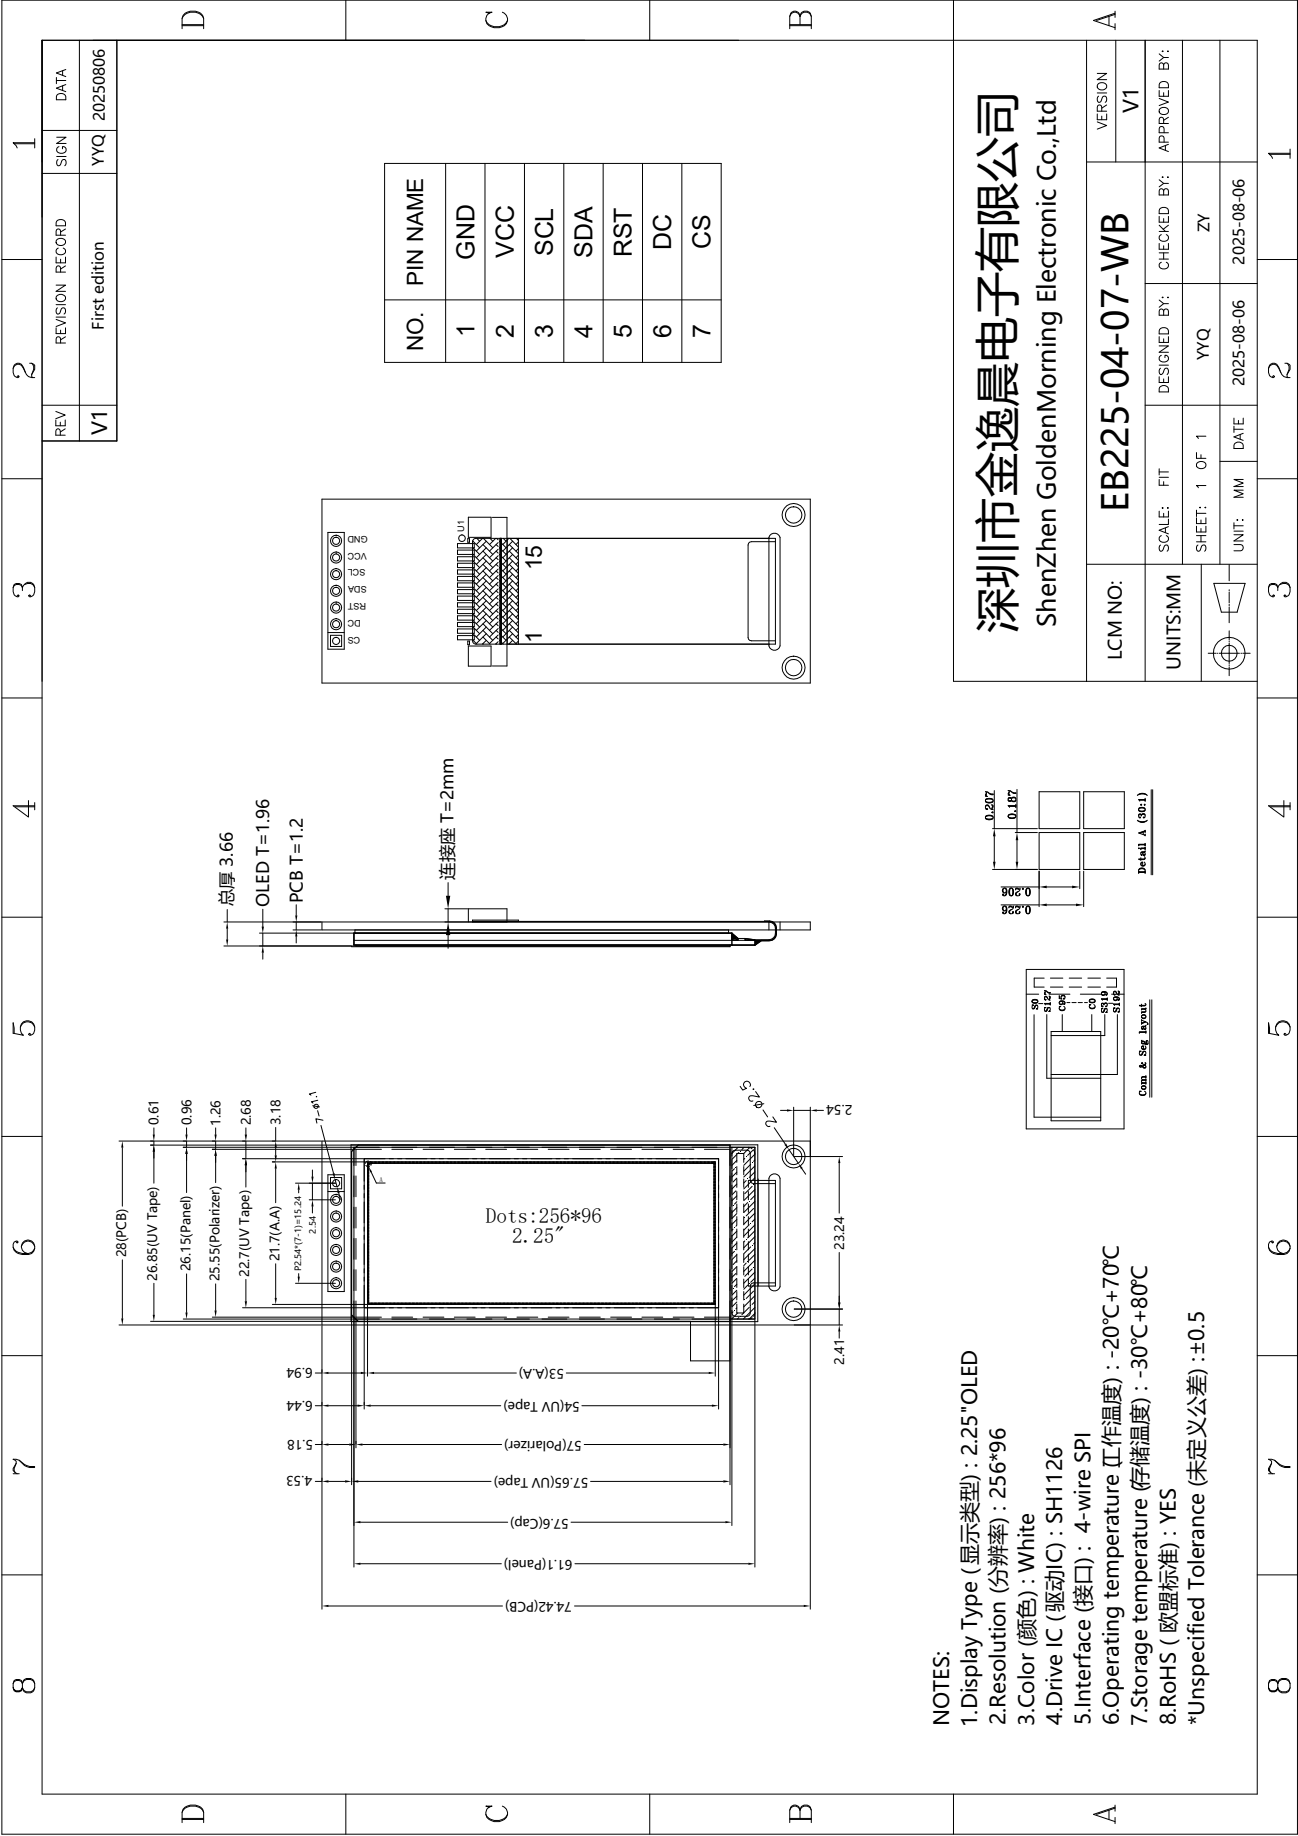

4. Absolute Maximum Ratings

Item	Symbol	Min.	Max.	Unit
Power Supply Voltage	VCC	-0.3	+5.5	V
Operating temperature	Top	-20	70	°C
Storage temperature	Tst	-30	80	°C

Note 1 : All the above voltages are on the basis of “VSS = 0V” .

Note 2 : When this module is used beyond the above absolute maximum ratings, permanent breakage of the module may occur. Also, for normal operations, it is desirable to use this module under the conditions according “Optics & Electrical Characteristics” . If this module is used beyond these conditions, malfunctioning of the module can occur and the reliability of the module may deteriorate.

Note 3 : The defined temperature ranges do not include the polarizer. The maximum withstood temperature of the polarizer should be 80°C.

Note 4 : 50% Checkerboard.End of lifetime is specified as 50% of initial brightness reached. The average operating lifetime at room temperature is estimated by the accelerated operation at high temperature conditions.

5. DC Characteristics

Item	Symbol	Min.	Typ.	Max.	Unit
Supply Voltage	VCC	3.0	3.3	5.5	V
Input high voltage	V _{IN}	0.8*VDD	-	-	V
Input low voltage	V _{IL}	-	-	0.2*VDD	V
Output high voltage	V _{OH}	0.8*VDD	-	-	V
Output low voltage	V _{OL}	-	-	0.2*VDD	V
VCC Supply Current	ICC	-	2.1	3	MA

Note 1 : Brightness (Lbr) and Supply Voltage for Display (VCC) are subject to the change of the panel characteristics and the customer’ s request.


Note 2 : The above refers to the DC characteristics of the LCD screen.

6. Pins Definitions.

PIN NO.	PIN NAME	DESCRIPTION
1	GND	Ground
2	VCC	3.0 - 5.5V power supply
3	SCL	Serial Clock Input Signal.
4	SDA	Serial Data Input Signal.
5	RST	This is a reset signal input pad. When RST is set to "L", the settings are initialized. The reset operation is performed by the RST signal level.
6	DC	This is the Data/Command control pad that determines whether the data bits are data or a command. DC = "H": the inputs at SDA and SCL are treated as display data. DC = "L": the inputs at SDA and SCL are transferred to the command registers.
7	CS	This pad is the chip select input. When /CS = "L", then the chip select becomes active, and data/command I/O is enabled.

7. Timing Characteristics.

Serial interface characteristics (4 Wire SPI)

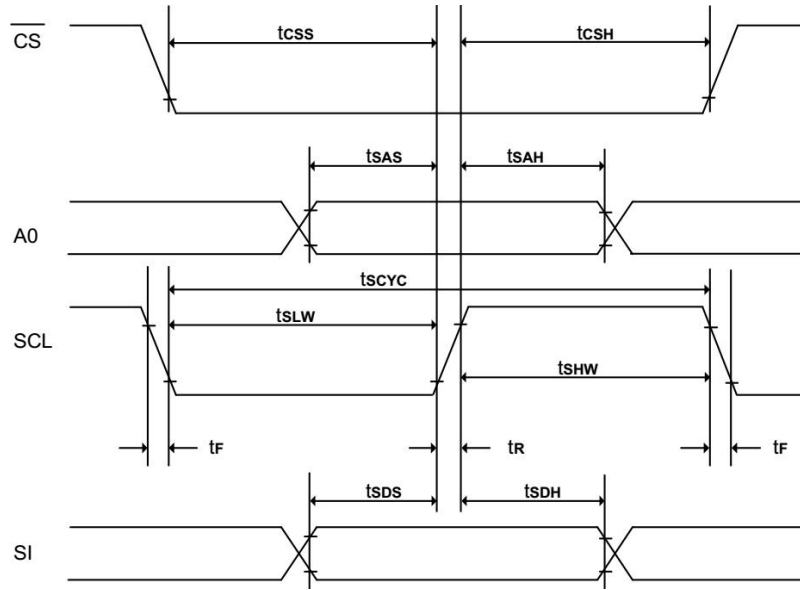

(VDD1 = 1.65V to 3.5V, TA = 25°C)

Symbol	Parameter	Min.	Typ.	Max.	Unit	Condition
tSCYC	Serial clock cycle	500	-	-	ns	
tSAS	Address setup time	300	-	-	ns	
tSAH	Address hold time	300	-	-	ns	
tSDS	Data setup time	200	-	-	ns	
tSDH	Data hold time	200	-	-	ns	
tCSS	$\overline{\text{CS}}$ setup time	240	-	-	ns	
tCSH	$\overline{\text{CS}}$ hold time time	120	-	-	ns	
tSHW	Serial clock H pulse width	200	-	-	ns	
tSLW	Serial clock L pulse width	200	-	-	ns	
tR	Rise time	-	-	30	ns	
tF	Fall time	-	-	30	ns	

(VDD1 = 2.4V to 3.5V, TA = 25°C)

Symbol	Parameter	Min.	Typ.	Max.	Unit	Condition
tSCYC	Serial clock cycle	250	-	-	ns	
tSAS	Address setup time	150	-	-	ns	
tSAH	Address hold time	150	-	-	ns	
tSDS	Data setup time	100	-	-	ns	
tSDH	Data hold time	100	-	-	ns	
tCSS	$\overline{\text{CS}}$ setup time	120	-	-	ns	
tCSH	$\overline{\text{CS}}$ hold time time	60	-	-	ns	
tSHW	Serial clock H pulse width	100	-	-	ns	
tSLW	Serial clock L pulse width	100	-	-	ns	
tR	Rise time	-	-	15	ns	
tF	Fall time	-	-	15	ns	

8. Electro-optical Characteristics.

ITEM	SYMBOL	TEST CONDITION	MIN	TYPE	MAX	UNIT
Normal Mode Brightness	Lbr	All pixels ON ⁽¹⁾	110	150	-	cd/m ²
Normal Mode Power Consumption	Pt	All pixels ON ⁽¹⁾	-	708	900	mW
Sleep mode current consumption in VDD1	ISP	During sleep, TA = +25°C, VDD1 = 3V	-	0.02	10	uA
Sleep mode current consumption in VPP		During sleep, TA = +25°C, VPP = 12V	-	0.02	10	uA
C.I.E(White)	(X)	x,y(CIE1931)	0.28	-	0.32	-
	(Y)		0.29	0.33	0.37	-
Dark Room Contrast	CR	-	≥2000:1	-	-	-
Response Time	-	-	-	10	-	μs
View Angle	-	-	≥160	-	-	Degree

Note(1): Normal Mode test conditions are as follows:

- Driving voltage: 12V.
- Contrast setting: 0XF0
- Frame rate: 84Hz
- Duty setting: 1/96

9. Reliability

9.1. MTBF

The LCD module shall be designed to meet a minimum MTBF value of 50000 hours with normal.

9.2. Test Condition

No	Item	Condition	Criteria
1	High Temperature Operating	70℃*24Hrs	1. No Defect Of Operational Function In Room Temperature Are Allowable. 2. IDD of LCM in Pre-and Post-Test Should Follow Specification.
2	Low Temperature Operating	-20℃*24Hrs	
3	High Humidity Storage	50℃*90%RH*24Hrs	
4	High Temperature Storage	80℃*24Hrs	
5	Low Temperature Storage	-30℃*24Hrs	
6	Thermal Cycling Test Storage	-	
7	Packing vibration	-	
8	Electrical Static Discharge	-	
		-	
9	Drop Test (Packaged)	-	

Note 1 : The test samples should be applied to only one test item.

Note 2 : Sample size for each test item is 2pcs.

Note 3 : No defective function allowable.

10. Precautions

10.1. Storage Conditions

- 10.1.1. Store the panel or module in a dark place where the temperature is $23\pm5^{\circ}\text{C}$ and the humidity is below $45\pm 20\%\text{RH}$.
- 10.1.2. Store in anti-static electricity container.
- 10.1.3. Store in clean environment, free from dust, active gas, and solvent.
- 10.1.4. Do not place the module near organics solvents or corrosive gases.
- 10.1.5. Do not crush, shake, or jolt the module.
- 10.1.6. Strong light exposure causes degradation of polarizer and color filter.

10.2. Handling Precautions

- 10.2.1. Avoid static electricity, which can damage the CMOS LSI.
- 10.2.2. The polarizing plate of the display is very fragile, please handle it very carefully.
- 10.2.3. Do not give external shock.
- 10.2.4. Do not apply excessive force on the surface.
- 10.2.5. Do not wipe the polarizer with dry cloth, as it might cause scratch. If the surface of the LCD needs to be cleaned, wipe it swiftly with cotton or other soft cloth soaked with petroleum IPA, do not use other chemicals.
- 10.2.6. Reverse and use within ratings in order to keep performance and prevent damage
- 10.2.7. Do not remove the panel or frame from the module.
- 10.2.8. Except for soldering the interface, do not make any alterations or modifications with a soldering iron; Ensure welding temperature at 320°C to 350°C , the welding time control within the 10 s, welding note don't stay too long in the same place to avoid scald FPC.

10.3. Limited Warranty

- 10.3.1. Our warranty liability is limited to repair and/or replacement. We will not be responsible for any consequential loss. (我们的保证责任仅限于修理和/或更换。我们将不负任何相应的损失。)
- 10.3.2. If possible, we suggest customer to use up all modules in six months. If the module storage time over twelve months, we suggest that recheck it before the module be used. (如果可能，我们建议客户在 6 个月内用完所有模块。如果模块存放时间超过 12 个月，我们建议在使用模块前重新检查。)
- 10.3.3. The warranty period is twelve months from the date of delivery. Buyer shall complete the assembly of all processes within twelve months of validity. During the warranty period, if the product quality problems, our company will be responsible for repair and replacement. All products must be stored and handled in accordance with regulations. Under warranty. When the goods do not comply with the above terms, we do not provide warranty services. (保修期为交货之日起十二个月。买方应在 12 个月内完成所有流程的组装。在保修期内，如果产品出现质量问题，我公司将负责维修和更换。所有产品必须按照规定储存和处理。在保修期内。当货物不符合上述条款时，我们不提供保修服务。)