
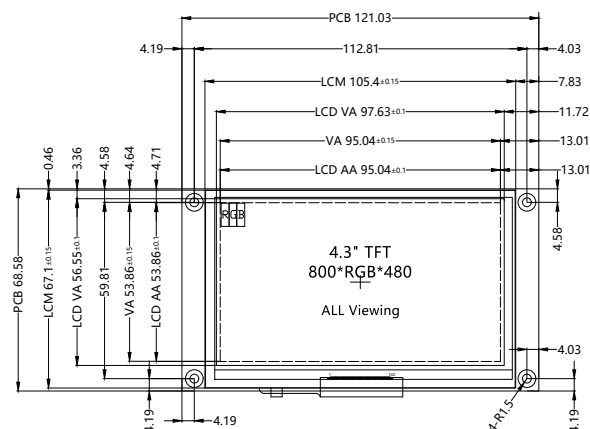
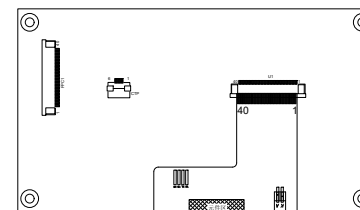


REV	REVISION RECORD	SIGN	DATA
V1	First edition	YYQ	20260804

CTP	
NO.	PIN NAME
1	TP_VCC
2	CTP_RST
3	CTP_INT
4	CTP_SCL
5	CTP_SDA
6	GND

FPC1	
NO.	PIN NAME
1	VCC
2	VCC
3	R0
4	R1
5	R2
6	R3
7	R4
8	R5
9	R6
10	R7
11	GND
12	G0
13	G1
14	G2
15	G3
16	G4
17	G5
18	G6
19	G7
20	GND
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	CLK
31	HS
32	VS
33	DE
34	BL
35	TP_CS
36	TP_MOSI
37	TP_MISO
38	TP_SCK
39	TP_PEN
40	RST

注：电容屏
1.TP_CS=CTP_RST
2.TP_PEN=CTP_INT
3.TP_MOSI=CTP_SDA
4.TP_SCK=CTP_SCL



NOTES:

- Display Size (显示尺寸): 4.30" TFT
- Viewing Direction (视角方向): ALL
- Display Mode (显示模式): Transmissive/Normally Black
- Resolution (分辨率): 800*RGB*480
- Color (颜色): 262K
- Drive IC (驱动IC): ST7265
- Interface (接口): RGB
- Electrical (电源): 5V(TYP)
- Luminance (透屏亮度): 250 cd/m²(TYP)
- Operating temperature (工作温度): -20°C+70°C
- Storage temperature (存储温度): -30°C+80°C
- RoHS (欧盟标准): YES
- *Unspecified Tolerance (未定义公差): ±0.5

深圳市金逸晨电子有限公司
ShenZhen GoldenMorning Electronic Co.,Ltd

LCM NO:	TB430-01-40-B			VERSION
				V1
UNITS:MM	SCALE: FIT	DESIGNED BY: YYQ	CHECKED BY: ZY	APPROVED BY:
	SHEET: 1 OF 1	UNIT: MM	DATE: 2026-08-04	2026-08-04